

GLUE2 XML Renderings

David Meredith

GLUE2: XSD Style, Flat or Nested

- Flat:
 - Entities are equal siblings listed in a global element bag.
 - <Associations> modelled using 1 method:
 - Element ID references (all associations defined as children of <Associations> elements).
- Nested:
 - Defines multiple Document Root elements.
 - <Associations> modelled using 2 methods:
 - Nesting (defines strong parent-child relationships)
 - Element ID references (a single entity can have many parents which cannot be modelled by nesting alone – GLUE2 is not a pure tree structure).
- Flat voted as preferred style at OGF 35 but...
- Not a complete consensus, some prefer nested.
- Hope to derive a style consensus/solution soon...

GLUE2: GOCDB Requirements

- Render results from Projection queries
 - Projection queries simply specify the entities you need to render when building a SELECT query (for SQL, you would normally specify fields/cols).
- GOCDB provides 18 projection style methods:
 - get_service_endpoint
 - get_ngi
 - get_site
 - get_contact
 - get_downtime
 - get_site_contacts ...

GLUE2: GOCDB Requirements

```
<results>
  <ROC ROC_NAME="NGI_UK">
    <ROCNAME>NGI_UK</ROCNAME>
    <MAIL_CONTACT>UKNGI-OPERATIONS@jiscma
    <CONTACT>
    <CONTACT>
    <CONTACT>
    <CONTACT>
    <CONTACT>
    <CONTACT>
  </CONTACT>
  <CONTACT USER_ID="5955046" PRIMARY_KEY="44479G0" CI
    <FORENAME>John</FORENAME>
    <SURNAME>Kewley</SURNAME>
    <TITLE>Mr</TITLE>
    <DESCRIPTION/>
    <EMAIL>john.kewley@stfc.ac.uk</EMAIL>
    <TEL>+44 1925 603513</TEL>
    <WORKING_HOURS_START/>
    <WORKING_HOURS_END/>
    <CERTDN>/C=UK/O=eScience/OU=CLRC/
    <ROLE_NAME>NGI Operations Deputy
  </CONTACT>
  <CONTACT>
  <CONTACT>
  <CONTACT>
  <CONTACT>
  <CONTACT>
  <CONTACT>
  <CONTACT>
  <CONTACT>
```

1.

```
<results>
  <DOWNTIME>
  <DOWNTIME>
  <DOWNTIME>
  <DOWNTIME>
  <DOWNTIME ID="25994" PRIMARY_KEY="44479G0" CI
    <PRIMARY_KEY>44479G0</PRIMARY_KEY>
    <HOSTNAME>goc.egi.eu</HOSTNAME>
    <SERVICE_TYPE>egi.GOCDB</SERVICE_TYPE>
    <ENDPOINT>goc.egi.eu/egi.GOCDB</ENDPOINT>
    <HOSTED_BY>GRIDOPS-GOCDB</HOSTED_BY>
    <GOCDB_PORTAL_URL>https://goc.egi.eu/portal</GOCDB_PORTAL_URL>
    <SEVERITY>WARNING</SEVERITY>
    <DESCRIPTION>Network disruptions to allow for maintenance</DESCRIPTION>
    <INSERT_DATE>1299751740</INSERT_DATE>
    <START_DATE>1300176000</START_DATE>
    <END_DATE>1300190400</END_DATE>
    <FORMATED_START_DATE>2011-03-15 08:00</FORMATED_START_DATE>
    <FORMATED_END_DATE>2011-03-15 12:00</FORMATED_END_DATE>
  </DOWNTIME>
  <DOWNTIME>
  <DOWNTIME>
  <DOWNTIME>
  <DOWNTIME>
  <DOWNTIME>
  <DOWNTIME>
  <DOWNTIME>
  <DOWNTIME>
  <DOWNTIME>
```

2.

~ Consider 1000's of records = can produce large XML documents.

1) https://goc.egi.eu/gocdbpi/private/?method=get_roc_contacts&roc=NGI_UK

2) https://goc.egi.eu/gocdbpi/public/?method=get_downtime&topentity=GOCDDB

Nested

```
<Domains>
  <AdminDomain BaseType="Domain">
    <ID>99876</ID>
    <WWW>http://ngs.ac.uk</WWW>
    ...
    <ComputingService BaseType="Service">
      <ID>2341</ID>
      <Type>org.some.compute</Type>
      <QualityLevel>production</Quali
      <TotalJobs>434</TotalJobs>
      ...
      <ComputingEndpoint>
      <ComputingEndpoint>
      <ComputingEndpoint>
    </ComputingService>

    <StorageService BaseType="Service">
      <ID>2342</ID>
      <Type>org.some.compute</Type>
      <QualityLevel>production</Quali
      <StorageEndpoint>
      <StorageShare>
      <StorageManager>
    </StorageService>

    <Service BaseType="Service">
      <ID>2342</ID>
      <Type>org.srb.SRB3</Type>
      <QualityLevel>production</Quali
      <Endpoint>
    </Service>
  </AdminDomain>
</Domains>
```

1. Associations: uses both nesting + ID references (nesting can't do many parents). ❌
2. XSD enforces nested relationships. ✅
3. Easy doc traversal for many associations (i.e. XPath to select nested children rather than cross referencing) ✅
4. Can't project/select only the required entities without using multiple Doc roots. ❌
5. Redundant parent + sibling elements = bloated docs (consider 1000s of records). ❌
 - Could exclude optional siblings and optional parents which are redundant, but this is misleading (entities MUST always be rendered in full).

(... detail elided)

Flat XSD

```
<!-- Entities is the DOCUMENT ROOT ELEMENT -->
<element name="Entities" type="glue:ExtensibleEntit:
  <annotation>
</element>
<complexType name="ExtensibleEntities_t">
  <sequence>
    <element ref="glue:Location" minOccurs="0" />
    <element ref="glue:Contact" minOccurs="0" />
    <!-- Abstract element references -->
    <element ref="glue:Domain" minOccurs="0" maxOccurs="1" />
    <element ref="glue:AbstractService" minOccurs="0" maxOccurs="1" />
    <element ref="glue:AbstractEndpoint" minOccurs="0" maxOccurs="1" />
    <element ref="glue:Share" minOccurs="0" maxOccurs="1" />
    <element ref="glue:Manager" minOccurs="0" maxOccurs="1" />
    <element ref="glue:Resource" minOccurs="0" maxOccurs="1" />
    <element ref="glue:AbstractActivity" minOccurs="0" maxOccurs="1" />
    <element ref="glue:Policy" minOccurs="0" maxOccurs="1" />
    <!-- Concrete element references -->
    <element ref="glue:Benchmark" minOccurs="0" maxOccurs="1" />
    <element ref="glue:ApplicationEnvironment" minOccurs="0" maxOccurs="1" />
    <element ref="glue:ToComputingService" minOccurs="0" maxOccurs="1" />
    <element ref="glue:ToStorageService" minOccurs="0" maxOccurs="1" />
    <element ref="glue:StorageAccessProtocol" minOccurs="0" maxOccurs="1" />
    <element ref="glue:StorageServiceCapacity" minOccurs="0" maxOccurs="1" />
    <element ref="glue:StorageShareCapacity" minOccurs="0" maxOccurs="1" />
    <element ref="glue:ApplicationHandle" minOccurs="0" maxOccurs="1" />
  </sequence>
</complexType>

<element name="Location" type="glue:Location_t" />
<element name="Contact" type="glue:Contact_t" />
<element name="Domain" type="glue:Domain_t" abstract="true" />
<element name="AdminDomain" type="glue:AdminDomain_t" />
<element name="UserDomain" type="glue:UserDomain_t" />
```


<Entities> is Document Root:
(element bag that lists GLUE
entities as siblings in a defined
order).

Elements declared globally and
referenced from within
<Entities>.

GLUE elements can be
imported into standalone in 3rd
party XSD.

Flat

```
<glue:Entities
  xmlns:xsi='http://www.w3.org
  xmlns:glue='http://schemas.
  xsi:schemaLocation='http://
    <glue:Location>
    <glue:Contact>
    <glue:Contact>
    <glue:UserDomain>
    <glue:AdminDomain>
    <glue:AdminDomain>
    <glue:Service>
    <glue:ComputingService>
    <glue:StorageService>
    <glue:Endpoint>
    <glue:ComputingEndpoint>
    <glue:StorageEndpoint>
    <glue:ComputingShare>
    <glue:StorageShare>
    <glue:ComputingManager>
    <glue:StorageManager>
    <glue:DataStore>
    <glue:ExecutionEnvironment>
    <glue:Activity>
    <glue:ComputingActivity>
    <glue:AccessPolicy>
    <glue:MappingPolicy>
</glue:Entities>
```

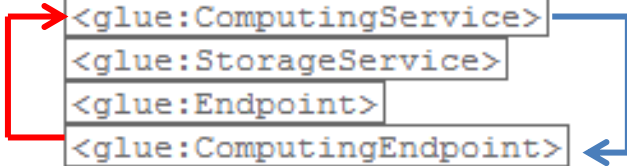


(elements are collapsed)

1. Single Doc Root element (<Entities>). ✓
2. Relationships modelled using one method; (ID references which caters for many-to-many parents – GLUE2 is not a pure tree structure!). ✓
3. Weaker association; relationship is not enforced by XSD.
 - Con: extra coding effort to validate that a reference points to correct element. ✗
 - Pro: a grid can be represented as multiple XML docs rather requiring a single doc. ✓
4. Traversing associations requires sub-queries (cross referencing element IDs) ✗
5. Supports Bi and Uni directional associations. ✓
6. Efficient = project just the required entities (e.g. select all contacts, select all endpoints etc). ✓

```
<glue:ComputingService BaseType="Service">
  <glue:ID>computingService1</glue:ID>
  <glue:Type></glue:Type>
  <glue:QualityLevel>production</glue:QualityLevel>
  <glue:Associations>
    <glue:ComputingEndpointID>computingEndpoint1</glue:ComputingEndpointID>
  </glue:Associations>
</glue:ComputingService>

<glue:ComputingEndpoint BaseType="Endpoint">
  <glue:ID>computingEndpoint1</glue:ID>
  <glue:URL>uri://some.url.ac.uk/service</glue:URL>
  <glue:InterfaceName></glue:InterfaceName>
  <glue:QualityLevel>development</glue:QualityLevel>
  <glue:HealthState>ok</glue:HealthState>
  <glue:ServingState>production</glue:ServingState>
  <glue:Associations>
    <glue:ComputingServiceID>computingService1</glue:ComputingServiceID>
  </glue:Associations>
</glue:ComputingEndpoint>
```

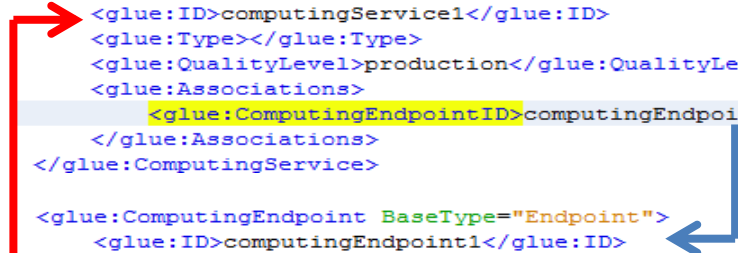


```

<?xml version="1.0" encoding="UTF-8"?>
<glue:Entities
  xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance'
  xmlns:glue='http://schemas.ogf.org/glue'
  xsi:schemaLocation='http://schemas.ogf.org/glue'
  <glue:ComputingService>
  <glue:ComputingService>
  <glue:ComputingService>
  <glue:ComputingService>
  <glue:ComputingService>
  <glue:ComputingService>
  <glue:StorageService>
  <glue:Endpoint BaseType="Endpoint">
    <ID>endpoint1</ID>
    <Extensions>
    <URL>uri://some.url.ac.uk/service</URL>
    <InterfaceName></InterfaceName>
    <QualityLevel>development</QualityLevel>
    <HealthState>ok</HealthState>
    <ServingState>production</ServingState>
    <DowntimeAnnounce>2012-03-29T12:30:00Z</DowntimeAnnounce>
    <DowntimeStart>2012-04-29T12:30:00Z</DowntimeStart>
    <DowntimeEnd>2012-05-29T12:30:00Z</DowntimeEnd>
    <DowntimeInfo>We had a power outage!</DowntimeInfo>
    <Associations>
  </glue:Endpoint>
  <glue:ComputingEndpoint>
  <glue:StorageEndpoint>
  <glue:StorageEndpoint>
  <glue:StorageEndpoint>
</glue:Entities>

```


Sample Flat Rendering (projecting services and endpoints)

- Can select/render (project) just the required entities under the same Doc root.
- Efficient: No redundant data (consider 1000s of records).
- When selecting multiple entities (e.g. 'select * services, endpoints, Contacts for NGI_X') its harder to traverse the associations in the results (lots of ID lookups).

Flat XSD

```
// Option: Element ID Referencing
<complexType name="ComputingService_t">
  <complexContent>
    <extension base="glue:ServiceBase_t">
      <sequence>
        <element name="TotalJobs" type="unsignedInt" minOccurs="0" maxOccu
        <element name="RunningJobs" type="unsignedInt" minOccurs="0" maxOc
        <element name="WaitingJobs" type="unsignedInt" minOccurs="0" maxOc
        <element name="StagingJobs" type="unsignedInt" minOccurs="0" maxOc
        <element name="SuspendedJobs" type="unsignedInt" minOccurs="0" max
        <element name="PreLRMSWaitingJobs" type="unsignedInt" minOccurs="0
        <element name="Associations" minOccurs="1" maxOccurs="1">
          <complexType>
            <sequence>
              <element name="ComputingEndpointID" type="glue:ID_t" m
              <element name="ComputingShareID" type="glue:LocalID_t"
              <element name="ComputingManagerID" type="glue:ID_t" mi
              <element name="StorageServiceID" type="glue:ID_t" minO
              <element name="ContactID" type="glue:ID_t" minOccurs="
              <element name="LocationID" type="glue:ID_t" minOccurs="
              <element name="ServiceID" type="glue:ID_t" minOccurs="
            </sequence>
          </complexType>
        </element>
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

All associations are element ID references

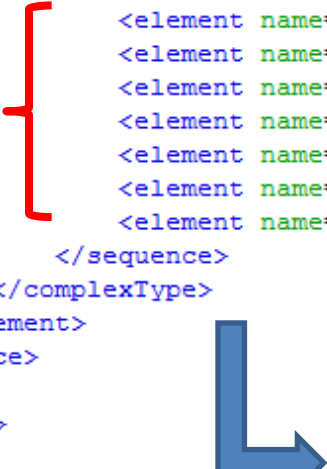

ID References to endpoints

```
<glue:ComputingService BaseType="Service">
  <ID>computingServiceReferencedEndpoints</ID>
  <Type></Type>
  <QualityLevel>production</QualityLevel>
  <Associations>
    <ComputingEndpointID>computingEndpoint1</Con
    <ComputingEndpointID>computingEndpoint3</Con
  </Associations>
</glue:ComputingService>
```

Sample XML

// Option: Nested

```
<complexType name="ComputingService_t">
  <complexContent>
    <extension base="glue:ServiceBase_t">
      <sequence>
        <element name="TotalJobs" type="unsignedInt" minOccurs="0" maxOccurs="1"/>
        <element name="RunningJobs" type="unsignedInt" minOccurs="0" maxOccurs="1"/>
        <element name="WaitingJobs" type="unsignedInt" minOccurs="0" maxOccurs="1"/>
        <element name="StagingJobs" type="unsignedInt" minOccurs="0" maxOccurs="1"/>
        <element name="SuspendedJobs" type="unsignedInt" minOccurs="0" maxOccurs="1"/>
        <element name="PreLRMSWaitingJobs" type="unsignedInt" minOccurs="0" maxOccurs="1"/>
        <element name="Associations" minOccurs="1" maxOccurs="1">
          <complexType>
            <sequence>
              <element ref="glue:ComputingEndpoint" minOccurs="0" maxOccurs="1"/>
              <element ref="glue:ComputingShare" minOccurs="0" maxOccurs="1"/>
              <element ref="glue:ComputingManager" minOccurs="0" maxOccurs="1"/>
              <element ref="glue:StorageService" minOccurs="0" maxOccurs="1"/>
              <element ref="glue:ToStorageService" minOccurs="0" maxOccurs="1"/>
              <element ref="glue:Contact" minOccurs="0" maxOccurs="1"/>
              <element ref="glue:Location" minOccurs="0" maxOccurs="1"/>
              <element name="ServiceID" type="glue:ID_t" minOccurs="0" maxOccurs="1"/>
            </sequence>
          </complexType>
        </element>
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

All
associations
are directly
nested

Nested XSD

Sample XML

Inner
(nested)
endpoints

```
<glue:ComputingService BaseType="Service">
  <ID>computingServiceReferencedEndpoints</ID>
  <Type></Type>
  <QualityLevel>production</QualityLevel>
  <Associations>
    <glue:ComputingEndpoint BaseType="Endpoint">
      <ID>computingEndpoint1</ID>
      <URL>uri://some.url.ac.uk/service</URL>
      <InterfaceName></InterfaceName>
      <QualityLevel>development</QualityLevel>
      <HealthState>ok</HealthState>
      <ServingState>production</ServingState>
      <Associations>
      </Associations>
    </glue:ComputingEndpoint>
  </Associations>
</glue:ComputingService>
```

Q. Should we consider a combined approach that enables a choice of nesting and/or element ID referencing according to the rendering requirements?

Q. Alternatively, define two separate XSDs (one flat and one nested)? - an equally valid approach, but requires 2 XSDs

```

<complexType name="ComputingService_t">
  <complexContent>
    <extension base="glue:ServiceBase_t">
      <sequence>
        <element name="TotalJobs" type="unsignedInt" minOccurs="0" maxOccurs="1",
        <element name="RunningJobs" type="unsignedInt" minOccurs="0" maxOccurs="1",
        <element name="WaitingJobs" type="unsignedInt" minOccurs="0" maxOccurs="1",
        <element name="StagingJobs" type="unsignedInt" minOccurs="0" maxOccurs="1",
        <element name="SuspendedJobs" type="unsignedInt" minOccurs="0" maxOccurs="1",
        <element name="PreLRMSWaitingJobs" type="unsignedInt" minOccurs="0" maxOccurs="1",
        <element name="Associations" minOccurs="1" maxOccurs="1">
          <complexType>
            <sequence>

```

Combined Approach (Nested + Refs)

Associations can be directly nested and/or referenced

```

          <element name="ComputingEndpointID" type="glue:ID_t" minOccurs="0" maxOccurs="1",
          <element ref="glue:ComputingEndpoint" minOccurs="0" maxOccurs="1">
            <element name="ComputingShareID" type="glue:LocalID_t" minOccurs="0" maxOccurs="1",
            <element ref="glue:ComputingShare" minOccurs="0" maxOccurs="1">
              <element name="ComputingManagerID" type="glue:ID_t" minOccurs="0" maxOccurs="1",
              <element ref="glue:ComputingManager" minOccurs="0" maxOccurs="1">
                <element name="StorageServiceID" type="glue:ID_t" minOccurs="0" maxOccurs="1",
                <element ref="glue:StorageService" minOccurs="0" maxOccurs="1">
                  <element name="ContactID" type="glue:ID_t" minOccurs="0" maxOccurs="1",
                  <element ref="glue:Contact" minOccurs="0" maxOccurs="unbounded",
                  <element name="LocationID" type="glue:ID_t" minOccurs="0" maxOccurs="1",
                  <element ref="glue:Location" minOccurs="0" maxOccurs="unbounded",
                  <element name="ServiceID" type="glue:ID_t" minOccurs="0" maxOccurs="1"
            </sequence>
          </complexType>
        </element>
      </sequence>
    </extension>
  </complexContent>
</complexType>

```

Note, a nested 'Service' association is not suitable here (thus only provide <ServiceID> option)

Sample XML




2 Referenced
+
1 Nested
endpoints

```

<glue:ComputingService BaseType="Service">
  <ID>computingServiceReferencedEndpoints</ID>
  <Type></Type>
  <QualityLevel>production</QualityLevel>
  <Associations>
    <ComputingEndpointID>computingEndpoint1</ComputingEndpointID>
    <ComputingEndpointID>computingEndpoint3</ComputingEndpointID>
    <glue:ComputingEndpoint BaseType="Endpoint">
      <ID>computingEndpoint1</ID>
      <URL>uri://some.url.ac.uk/service</URL>
      <InterfaceName></InterfaceName>
      <QualityLevel>development</QualityLevel>
      <HealthState>ok</HealthState>
      <ServingState>production</ServingState>
      <Associations>
        <ComputingServiceID>service2</ComputingServiceID>
      </Associations>
    </glue:ComputingEndpoint>
  </Associations>
</glue:ComputingService>

```

Combined Approach

- Single XSD for both styles 
- <Entities> as single + consistent Doc Root element.
 - <Child_Entity_Elements> can then nest their associated elements, or reference other entity elements to suit use cases, i.e.
 - Use Element refs to render projection queries 
 - Use Nesting for other (eg XPath friendly) renderings
- Combined approach is not new (its quite common); e.g. Spring framework caters for both Inner Beans + Bean references in 'spring-beans.xml' in exact same way.
- Explicit Validation Rule:
 - MUST fail if a duplicate <Element> exists with same ID in doc. 
- But, is this too flexible/complex?
 - Would need to be selective where we offer a choice of nested/idref; in some associations, a choice is not necessary (see previous slide). Note, it is possible to refine the combined approach e.g. using <xsd:choice> if necessary.
 - ✗ – Need logic to figure out what approach is being taken in a particular document
 - ⚠ – Implementations would need to be clear if they require/support a particular style (a profiling requirement ?).

Flat XSD: Grouping Elements and/or BaseType Attribute

Flat XSD: Grouping Elements and/or BaseType Attribute

- At least one (or both) of these approaches is required to simplify XPath querying of a Flat XML document.
- For the fully flat XSD, then the BaseType attribute is required to simplify XPath queries.
- (note, BaseType attribute was carried over from original nested XSD).
- Grouping elements adds slight complexity as not all entities are siblings, but does allow easy collapsing/expanding of elements belonging to the same substitution group (but is this really a Pro?).
- Grouping elements are just a 'nice to have'

Flat with Grouping Elements

<glue:Entities

```
xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance'
xmlns:glue='http://schemas.ogf.org/oglue'
xsi:schemaLocation='http://schemas.ogf.org/oglue http://schemas.ogf.org/oglue.xsd'
```

```
<glue:Location>
<glue:Contact>
<glue:Contact>
```

<glue:Domains>

```
<glue:UserDomain>
<glue:AdminDomain>
<glue:AdminDomain>
```

</glue:Domains>

<glue:Services>

```
<glue:Service>
<glue:ComputingService>
<glue:StorageService>
```

</glue:Services>

<glue:Endpoints>

```
<glue:Endpoint>
<glue:ComputingEndpoint>
<glue:StorageEndpoint>
```

</glue:Endpoints>

<glue:Shares>

```
<glue:ComputingShare>
<glue:StorageShare>
```

</glue:Shares>

<glue:Managers>

```
<glue:ComputingManager>
<glue:StorageManager>
```

</glue:Managers>

<glue:Activities>

```
<glue:Activity>
<glue:ComputingActivity>
```

</glue:Activities>

<glue:Policies>

```
<glue:AccessPolicy>
<glue:MappingPolicy>
```

</glue:Policies>

</glue:Entities>

No grouping elements needed for concrete elements (they have no substitutable alternatives)

<Services>
groups different
Service impls

<Endpoints>
groups different
Endpoint impls

<Managers> groups
different Manager
impls

Sample XPath to select all services,
endpoints with Grouping elements:

/Entities/Services/*
/Entities/Endpoints/*

Grey boxes =
Collapsed
elements

Flat with no Grouping Elements

<glue:Entities

```
xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance'
xmlns:glue='http://schemas.ogf.org/oglue'
xsi:schemaLocation='http://schemas.ogf.org/oglue http://schemas.ogf.org/oglue.xsd'
```

<glue:Location>

<glue:Contact>

<glue:Contact>

<glue:UserDomain>

<glue:AdminDomain>

<glue:AdminDomain>

<glue:Service>

<glue:ComputingService>

<glue:StorageService>

<glue:Endpoint>

<glue:ComputingEndpoint>

<glue:StorageEndpoint>

<glue:ComputingShare>

<glue:StorageShare>

<glue:ComputingManager>

<glue:StorageManager>

<glue:DataStore>

<glue:ExecutionEnvironment>

<glue:Activity>

<glue:ComputingActivity>

<glue:AccessPolicy>

<glue:MappingPolicy>

</glue:Entities>

Flat with no Grouping Elements Requires the BaseType Attribute to simplify Xpath

